

PDU15B8R/PDU15B10R
PDU15B12R/PDU20B10R

ENTRY-LEVEL POWER DISTRIBUTION

Provides reliable power distribution for connected equipment

Ideal for server room and IT applications, the Basic PDU Series is a power distribution device that delivers electricity from a single source to multiple devices. The products can work under high temperature, and also feature overload protection, external site ground pin, industrial-grade metal housing, adjustable mounting brackets, long input power cord, cord retention tray and IEC receptacle locking.


SERIES FEATURES

- Overload Protection
- Industrial-grade Metal Housing
- Adjustable Mounting Brackets
- Cord Retention Tray


PRODUCT CALLOUTS

- 1 . Output Circuit Breaker
- 2 . AC Outlets
- 3 . External Site Ground


- 4 . AC Power Cord
- 5 . Cord Retention Tray Screw Holes

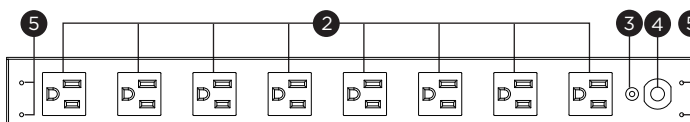


PDU15B8R



PDU15B10R



PDU15B12R

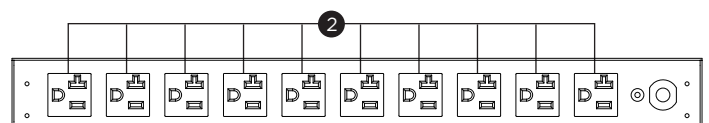

PDU20B10R



TECHNICAL SPECIFICATIONS

Model Name	PDU15B8R	PDU15B10R	PDU15B12R	PDU20B10R
Input				
Nominal Input Voltage (Vac)	100 - 120			
Input Frequency (Hz)	50 / 60			
Maximum Input Current (A)	12(UL)			16(UL)
Input Connector Type	NEMA 5-15P x 1			NEMA 5-20P x 1
Power Cord Length (m.)	4.5			
Output				
Over Current Protection (Each Bank) (A)	15			20
Outlet(s) - Total	8	10	12	10
Outlet(s) - Rear	8	10	12	10
Outlet Type	NEMA 5-15R x 8	NEMA 5-15R x 10	NEMA 5-15R x 12	NEMA 5-20R x 10
Physical				
Installed Rack Height (U)	1			
Cord Retention Tray	Yes			
Physical Size				
Dimensions (WxHxD) (mm.)	445 x 44.5 x 38.1			445 x 44.5 x 38.1
Weight (kg.)	2	2.01		2.3
Environmental				
Operating Temperature (°C)	0 - 50			
Operating Relative Humidity (Non-condensing) (%)	0 - 95			
Certifications				
Certifications*	UL60950, UL62368			
RoHS	Yes			

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
#All specifications are subject to change without notice.

