#### **Basic**

Series dedicated to the installer looking for high-level cameras that make the difference in image quality.



# 12-33K0AB-28

### **3K Fixed Lens Small Bullet Camera With IR LED**

Equipped with a 2.8mm fixed lens, this 3K Bullet camera is designed for short-distance surveillance systems (up to 20m) for indoor and outdoor scenarios. Featuring 4in1 technology selectable by the camera COC menu, the I2-33K0AB-28 is the better choice for entrylevel installations.


























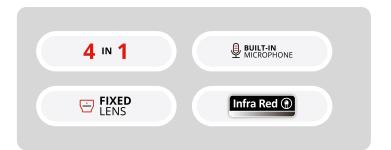

## **MAIN FEATURES**

- I2-33K0AB-28 3K Fixed Lens Small Bullet Camera With IR LED
- Sensor: 1/2.5" 3K CMOS Sensor
- Lens: 2.8mm Mega-Pixel Fixed (98°)
- True Day&Night-ICR
- 2D-DNR

- Digital WDR/HLC/BLC
- Illumination: 20m (2 High-Power IR LED)
- IP67
- Weight: 270g
- Power: DC12V/200mA



https://provision-isr.com



## **SPECIFICATIONS**

| Video                  |   |
|------------------------|---|
| Image Sensor           | 1/2.5" 3K CMOS Sensor   |
| Image Format           | 16:9  |
| Effective Pixels       | 2944 × 1656   |
| Scanning System        | Progressive   |
| Min. Illumination      | Color: 0.01lux @F1.2, AGC on B/W: 0lux with IR                  |
| Day & Night            | True Day&Night-ICR  |
| Day & Night Modes      | Ext/Auto/Day/Night  |
| Compression            |   |
| Resolution             | 3K: 2944 × 1656 AHD/TVI 4MP: 2560x1440 AHD/TVI/CVI CVBS: 700TVL |
| Frame Rate             | 3K @ 20FPS, 4MP @ 25FPS   |
| Image                  |   |
| Backlight Compensation | BLC   |
| S/N Ratio              | ≥52dB (AGC off)   |
| Privacy Zone           | no  |
| Noise Reduction        | 2D-DNR  |
| Image Enhancement      | Digital WDR, BLC, HLC, ROI                                      |
| On Screen Data         |   |
| CoC Support            | Yes   |
| OSD Menu               | Available via CoC only  |
| Lens                   |   |
| Field of View          | 2.8mm Mega-Pixel Fixed (98°)                                    |
| Iris                   | Fixed Iris  |
| Lens Mount             | M12 Mount   |

# **I2-33K0AB-28**



| Connectivity       |  |
|--------------------|--|
| Video Output       | 3K / 4MP (Selected by OSD Menu) AHD/TVI/CVI/CVBS + PAL/NTSC (Selected by OSD Menu) |
| Audio Connectivity | Built-in Microphone  |

| Housing          |                                   |
|------------------|-----------------------------------|
| Illumination     | 20m (2 High-Power IR LED)         |
| Bracket          | 3-Axis Bracket                    |
| Protection Rate  | IP67                              |
| Dimensions       | 172.2*73.4*74.5mm                 |
| Weight (gross)   | 270g                              |
| Power            | DC12V/200mA                       |
| Work Environment | -30°C ~ 50°C , 10% ~ 90% humidity |