



# MultiSync® PN-P Series Large Format Displays

PN-P556

ARRIVALS					ARRIVALS					DEPARTURES					DEPARTURES					DEPARTURES				
Flight	From	Status	Sched	Gate	Flight	From	Status	Sched	Gate	Flight	From	Status	Sched	Gate	Flight	From	Status	Sched	Gate	Flight	From	Status	Sched	Gate
4866	Chicago, IL	Arrived	10:37 AM	F80	2847	Chicago, IL	In Air	11:23 AM	A8	2340	Philadelphia, PA	Delayed	12:18 PM	E70	326	Washington, DC	In Air	1:40 PM	A9	809	Philadelphia, PA			
6840	Chicago, IL	Arrived	10:37 AM	F80	2919	Chicago, IL	In Air	11:23 AM	A8	1337	Denver, CO	In Air	12:29 PM	A7	2835	Washington, DC	In Air	1:40 PM	A9	4429	Philadelphia, PA			
2042	New York, NY	Arrived	10:38 AM	Term M - E65	3460	Chicago, IL	In Air	11:23 AM	A8	5167	Denver, CO	In Air	12:29 PM	A7	7924	Washington, DC	In Air	1:40 PM	A9	5710	Philadelphia, PA			
2706	Boston, MA	Arrived	10:38 AM	Term M - E67	3362	Nashville, TN	In Air	11:25 AM	C43		Washington, DC	In Air	1:23 PM	F79	7999	Washington, DC	In Air	1:40 PM	A9	7277	Philadelphia, PA			
4459	New York, NY	Arrived	10:38 AM	Term M - E65	683	Washington, DC	Landed	11:29 AM	A9		Washington, DC	In Air	1:23 PM	F79	8856	Washington, DC	In Air	1:40 PM	A9	8617	Philadelphia, PA			
4765	New York, NY	Arrived	10:38 AM	Term M - E65	2031	Washington, DC	Landed	11:29 AM	A9		Washington, DC	In Air	1:30 PM	C33	2360	Dallas-Fort Worth, TX	Delayed	1:52 PM	F80	3125	New York, NY			
6469	New York, NY	Arrived	10:38 AM	Term M - E65	2832	Washington, DC	Landed	11:29 AM	A9		Washington, DC	In Air	1:35 PM	Term M - E66	2516	Dallas-Fort Worth, TX	Delayed	1:52 PM	F80	205	Grand Cayman			
458	Baltimore, MD	Arrived	10:40 AM	C37	436	Charlotte, NC	In Air	11:45 AM	A9		Washington, DC	In Air	1:35 PM	C37	5722	Dallas-Fort Worth, TX	Delayed	1:52 PM	F80	2195	New York, NY			
1186	Cleveland, OH	Arrived	10:40 AM	A6	2523	Philadelphia, PA	In Air	11:49 AM	A9		Washington, DC	In Air	1:35 PM	Term M - E66	6485	Dallas-Fort Worth, TX	Delayed	1:52 PM	F80	7539	New York, NY			
467	Washington, DC	Arrived	10:41 AM	F78	1336	Baltimore, MD	In Air	11:50 AM	C43		Washington, DC	In Air	1:35 PM	Term M - E66	6695	Dallas-Fort Worth, TX	Delayed	1:52 PM	F80	57	Fort Lauderdale, FL			
1189	Dallas-Fort Worth, TX	Arrived	10:44 AM	F84	76	Fort Lauderdale, FL	In Air	12:00 PM	A8		Washington, DC	In Air	1:35 PM	Term M - E66	114	Burlington, VT	Scheduled	1:57 PM	C45	422	Baltimore, MD			
6042	Dallas-Fort Worth, TX	Arrived	10:44 AM	F84	2076	Atlanta, GA	In Air	12:00 PM	C35		Washington, DC	In Air	1:35 PM	Term M - E66	1899	Baltimore, MD	Departed	2:00 PM	C30	1534	Hartford, CT			
2710	Charlotte, NC	Arrived	10:53 AM	F79	2895	Chicago, IL	In Air	12:00 PM	C39		Washington, DC	In Air	1:35 PM	Term M - E66	2705	Phoenix, AZ	Scheduled	2:00 PM	C38	1583	Chicago, IL			
430	St Louis, MO	Arrived	11:00 AM	C38	3076	Fort Lauderdale, FL	In Air	12:00 PM	A8		Washington, DC	In Air	1:35 PM	Term M - E66	572	Fort Lauderdale, FL	Departed	2:05 PM	C34	1625	Nashville, TN			
2301	Minneapolis, MN	Arrived	11:09 AM	Term M - E68	5476	Fort Lauderdale, FL	In Air	12:00 PM	A8		Washington, DC	Delayed	1:36 PM	Term A - A10	1100	Detroit, MI	Departed	2:09 PM	Term M - E65	2851	Chicago, IL			
532	Wilmington, DE	Arrived	11:12 AM		891	Boston, MA	In Air	12:09 PM	Term A - A10		Washington, DC	In Air	1:36 PM	Term A - A10	1876	Detroit, MI	Departed	2:09 PM	Term M - E65	3057	Fort Lauderdale, FL			
1587	Atlanta, GA	Landed	11:12 AM	Term M - E66	2473	Boston, MA	In Air	12:09 PM	Term A - A10		Washington, DC	In Air	1:36 PM	Term A - A10	2721	Detroit, MI	Departed	2:09 PM	Term M - E65	3301	Chicago, IL			
6136	Atlanta, GA	Landed	11:12 AM	Term M - E66	125	New York, NY	In Air	12:26 PM	Term A - A10		Washington, DC	In Air	1:36 PM	Term A - A10	6541	Detroit, MI	Departed	2:09 PM	Term M - E65	3468	Chicago, IL			
6639	Atlanta, GA	Landed	11:12 AM	Term M - E66	2072	New York, NY	In Air	12:26 PM	Term A - A10		Washington, DC	In Air	1:36 PM	Term A - A10	195	Bogota	Cancelled	2:15 PM		4407	Fort Lauderdale, FL			
1473	Philadelphia, PA	In Air	11:13 AM	E70	7857	New York, NY	In Air	12:26 PM	Term A - A10		Washington, DC	In Air	1:36 PM	Term A - A10	5873	Bogota	Scheduled	2:15 PM		5057	Fort Lauderdale, FL			
1664	Toronto	Landed	11:20 AM	Term 1 - E73	8760	New York, NY	In Air	12:26 PM	Term A - A10		Washington, DC	In Air	1:36 PM	Term A - A10	516	Philadelphia, PA	Scheduled	2:22 PM	A17	5457	Fort Lauderdale, FL			
2326	Chicago, IL	In Air	11:23 AM	A8	1099	Atlanta, GA	Departed	12:26 PM	Term A - A10		Washington, DC	In Air	1:36 PM	Term A - A10	3345	Milwaukee, WI	Delayed	2:40 PM	C31	6543	Chicago, IL			
5° · -- · Evening, 73° · Chance of Rain 1% · Overnight					t. 64° · Chance of Rain 1% · Overnight					6° · Morning, 74° · -- · Afternoon, 86° · -- · Evening, 73° · Chance of Rain 1% · Overnight					6° · Morning, 74° · -- · Afternoon, 86° · -- · Evening, 73° · Chance of Rain 1% · Overnight					6° · Morning, 74° · -- · Afternoon, 86° · -- · Evening, 73° · Chance of Rain 1% · Overnight				

Impactful Displays that Deliver

# Say goodbye to dull, inconsistent displays

## Professionally Crafted for High-Impact Messaging

The Sharp MultiSync® PN-P Series is your trusted choice for bold, ultra-reliable digital signage—built to perform in environments with higher ambient lighting and extended runtime needs such as healthcare, command centers, finance, retail, and corporate settings. Featuring factory-calibrated color precision, flexible performance options, and a tough all-metal chassis, these displays deliver stunning visuals and commercial-grade durability straight out of the box.

## Key Pain Points—Solved

**Tired of inconsistent colors across displays?** SpectraView™ Engine gives you pixel-perfect factory calibration and pro-level customization.

**Looking for more accurate color reproduction?** These displays have wide color gamut panels, allowing you access to a broader range compared to standard displays. This will give you more accurate color reproduction for retail, corporate or education branding.

**Dealing with outdated or clunky setups?** Enjoy seamless modular upgrades with Intel® SDM and Raspberry Pi Compute Module 4 support.

**Struggling with overheating or display dimming?** Smart cooling tech keeps your visuals bright and your system protected.

**Need 24/7 uptime in tough environments?** Full metal build, active cooling, and secure LAN controls ensure long-term reliability.



## High-End UHD Visuals, All Day, Every Day

Get next-level clarity with native 3840 x 2160 resolution and anti-glare, high-haze glass across the entire PN-P Series lineup. Imagery and messaging can become more vivid and lifelike than ever before! Additionally, these models boast an impressive 700 cd/m<sup>2</sup> in brightness, ensuring that your message cuts through—even in high-ambient light spaces.

**4K UHD**


## Consistent Color with SpectraView™ Engine

Pre-calibrated for luminance, white point, gamma, and uniformity, every PN-P display features SpectraView Engine Technology and is ready to go, right out of the box. Want deeper control? Through the SpectraView Engine, dial in white point with adjustments of 100k, select brightness based on luminance level, or even input your own CIE color coordinates, giving users capabilities like never before. Bonus: backlight stabilization keeps your visuals looking fresh longer - no early fade-outs here. **All of these features are specifically engineered to give you the best visual quality for an extended duration.**

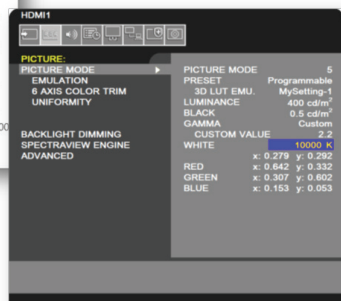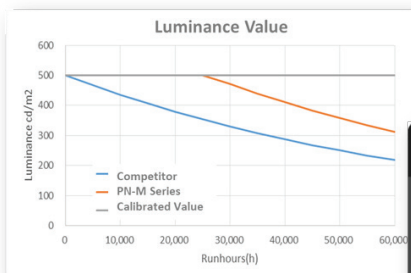

## Smarter Daisy Chaining & Multi-Display Sync

Connect up to 4 independent displays from one source thanks to DisplayPort 1.4 connectivity and HBR3 capabilities with Multi-Stream Transport (MST\*). MST capabilities can drive up to 4 independent displays from a single DisplayPort source by multiplexing several video streams into a single stream and sending it to the display that then acts as a branch device to demultiplex the signals into the original streams -ideal for menu boards, video walls, and synchronized signage. Additionally, the display can daisy chain the LAN connection, which allows for the pass-through of RS-232C, TCP/IP and IR communications. This gives the customer the ability to control full arrays of displays remotely or via the IR remote control, streamlining the ease of use to the customer.

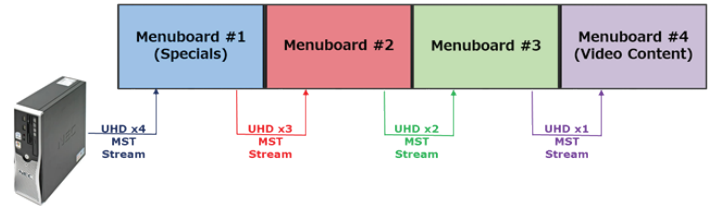

\*MST capabilities depends on the video card driving the system.


## Power, Connect, Control—Simplified

Each PN-P product features an integrated USB hub, with a USB-C input that supports both DP-Alt mode and upstream data transfer. It includes two downstream USB ports (one USB-A and one USB-C) for connecting and managing peripherals. This built-in hub reduces the need for additional equipment, lowering overall setup costs. Additionally, the USB-C input provides 65W of Power Delivery, enabling devices like laptops to charge directly from the display—ideal for huddle spaces and presentation environments.



## Commercial Toughness You Can Trust


A full-metal chassis, carrying handles, and active cooling system mean it's ready for harsh environments without compromising the sleek design. Integrated temperature sensors keep your brightness consistent without thermal dimming - your content stays front and center, even in the harsher conditions found in commercial environments.

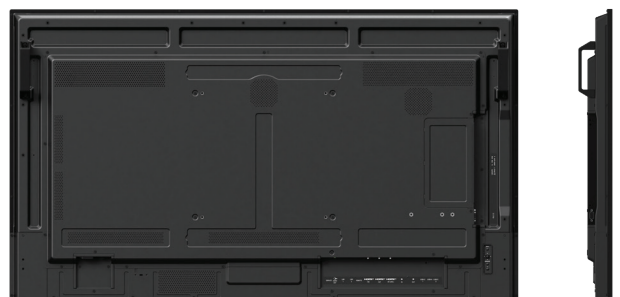




## Built for Flexibility

The MultiSync PN-P Series is **modular by design**, ready to integrate Intel® Smart Display Modules (SDM-L/SDM-S) and Raspberry Pi Compute Module 4 for embedded intelligence without external gear or messy cabling. Through clever mechanical and electrical design, the PN-P Series allows for sleek all-in-one intelligence and interoperability in a small form factor setting, giving you everything you need for digital signage applications while also offering the ability to enhance your screen through multiple integrated professional technologies - all while simplifying installations and allowing for clean and easy set-up.

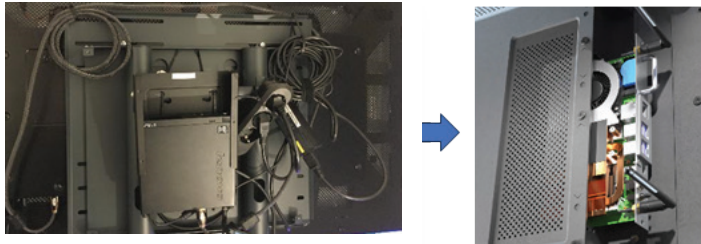

## Built-in Security for IT Peace of Mind

With **IEEE802.1x authentication via the LAN connection**, SSL/TLS browser control, LAN and USB port disabling, and MAC/IP filtering, the MultiSync PN-P Series helps keep your network secure and locked down.

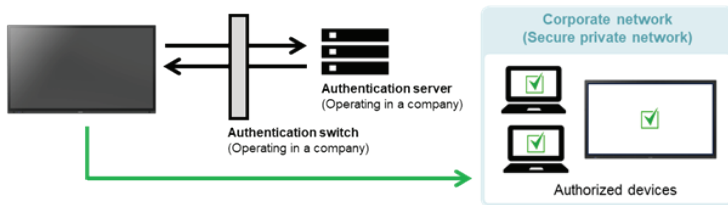

## Total Control with NaViSet Administrator™

Remotely manage all your PN-P Series - and other Sharp or NEC displays - from a single, centralized dashboard using **NaViSet Administrator 2™**. Perfect for multi-display setups, this free tool lets you monitor status, automate tasks, generate reports, and make on-demand changes from anywhere. Want even more power? Upgrade to the **Server Edition** for enhanced features and full remote access across your ecosystem.



## Smart Input Prioritization

Auto-switch between up to three prioritized inputs or power on with a live signal - no more blank screens or manual resets. If a primary source goes down, the display will automatically switch to whatever the customer has prioritized next. The first detect option also allows for the display to automatically switch to any source that plugs into it, allowing the display to wake on any synced signal.

### Typical Display



### PN-P Series







### First Detect



## Bottom Line:

The Sharp MultiSync PN-P Series brings next-gen display power, all-day reliability, and built-in flexibility—wrapped in a clean, modern design that makes your content pop. Whether you're running a control room or creating an unforgettable retail experience, the PN-P Series is here to boost your signage game and keep it fresh 24/7.

MODEL		PN-P556	
LCD MODULE	Panel Technology		IPS
	Viewable Image Size		54.6"
	Native Resolution		3840 x 2160
	Brightness (Typical)		700 cd/m <sup>2</sup>
	Contrast Ratio (Typical)		1200:1
	Viewing Angle		178° Vert., 178° Hor. (89U/89D/89L/89R) @ CR>10
	Aspect Ratio		16:9
	Color Gamut		92% DCI
	Displayable Colors		Over 1.07 Billion (10bit dithered)
	Orientation		Landscape and Portrait (CCW Rotation)
	Panel Haze (%)		25
CONNECTIVITY	Input Terminals	Digital	HDMI 2.0 x2, DP 1.4 2, USB-C (Upstream with DP-Alt Mode and 65W Power Delivery)
		Analog	N/A
		Audio	N/A
		External Control	LAN (100Mbit), 3.5mm Mini Jack IR Remote, RS-232C
		Data	USB-C (Upstream with DP-Alt Mode and 65W Power Delivery), USB-A 2.0 (Service), USB-A (Downstream), USB-C (Downstream)
	Output Terminals	Digital	HDMI x1, DisplayPort x1 (Carries DP or DP-Alt signals via USB-C)
		Analog	N/A
		Audio	3.5mm Mini Jack
		External Control	LAN (100Mbit, carries RS-232C and IR)
POWER CONSUMPTION	On (Typ/Max Brightness/ All Max)		115W/180W/365W
	Network Standby		0.5W
	Normal Standby		2W
	Current Rating		4.1A - 1.7A @ 100V - 240V
	Speaker Rating		Optional through SP-RM3a
PHYSICAL SPECIFICATIONS	Bezel Width (L/R, T/B)		11.0mm/11.0mm, 11.0mm/13.9mm
	Net Dimensions (Without stand; W x H x D)		48.7 x 27.9 x 2.3 in. 1235.6 x 709.3 x 59.5mm
	Net Weight		20.5kg/45.2lbs.
	VESA Hole Configuration		4 x M6 (300 x 300)
SENSORS	Ambient Light Sensor		Integrated
	Human Sensor		Optional through PN-KTRC3
	Temperature Sensor		Integrated and programmable; linked to cooling fans
	NFC Sensor		N/A
ENVIRONMENTAL CONDITIONS	Operating Temperature		0 to 40C
	Operating Humidity		20-80%
	Operating Altitude		3000m (9843ft)
LIMITED WARRANTY		5 years Advanced Replacement	
ADDITIONAL FEATURES		AMX Support, Automated Email Alert Function, CEC Support through HDMI, Crestron Connected V2 Support with XiO Cloud, IEEE802.1x Wired Network Authentication, SSH, Naviset Secure, Signed FW upon Install, Admin Login, IP Address Filtering, MAC Address Filtering, SNMP V1/2/3, USB/LAN Lockout Capability, PD Comms Tool Support, NEC Firmware Update Tool, Display Browser Control, Display Wall Calibrator Compatible, HDR Support (PQ, HLG, HDR10), Key Guide, NaViSet Administrator 2 Compatible, OSD Rotation for Portrait Orientation, SDM Compatible, PJ Link Support, USB Power Delivery via USB-C (65W), Raspberry Pi Compute Module Compatible, Real Time Clock, Local Dimming, Multi Picture Mode, SpectraView Engine Technology, Quick Input Change, Quick Start, Internet Time Server, Auto ID/IP Settings, Energy Star 8.0	
SHIPS WITH		3m AC Power Cord, 2.0m HDMI Cable, IR Remote Control, Batteries, AAA batteries	
OPTIONAL SPEAKERS		SP-RM3a	
OPTIONAL STAND		PN-ST431, ST-43M	
OTHER ACCESSORIES		All SDM Option Cards, Raspberry Pi Compute Module 4 with optional NEC Interface Board, Human Sensor (PN-KTRC3)	

The Android robot is reproduced or modified from work created and shared by Google and used according to terms described in the Creative Commons 3.0 Attribution License. Sharp, MultiSync, NaViSet and TileMatrix and all related trademarks are trademarks or registered trademarks of Sharp Corporation and/or its affiliated companies. The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. Crestron, the Crestron logo, Crestron Connected, and XiO Cloud are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. All other brand names and product names may be trademarks or registered trademarks of their respective owners. Design and specifications are subject to change without prior notice. Screen images simulated.


SHARP

SHARP ELECTRONICS CORPORATION

100 Paragon Drive, Montvale, NJ 07645

1-800-BE-SHARP • [business.sharpsusa.com/displays-projectors](https://business.sharpsusa.com/displays-projectors)

PN-P556 Specifications

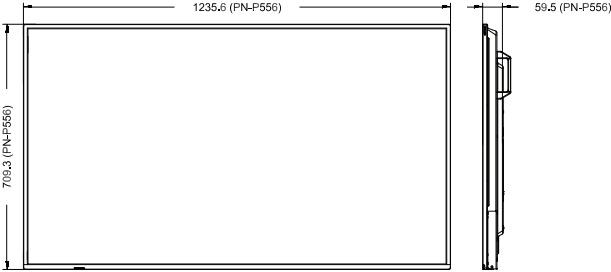


Tabletop Stand

ST-43M (PN-P556)



Wall Mount

WMK-3298T

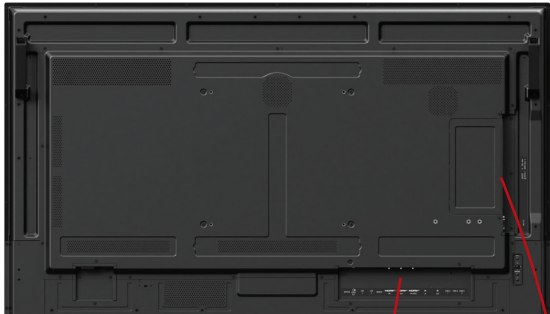

Bottom Panel



Input Panels

Side Panel

1.

USB-A (Service)
2.

Audio Mini Jack Out
3.

LAN1 (Control In)
4.

LAN2 (Control Out)
5.

IR Remote IN
6.

HDMI IN2
7.

HDMI Out
8.

HDMI IN1 (ARC)
9.

DisplayPort In
10.

DisplayPort Out
11.

USB-C1 (Upstream, DP-Alt Mode, 65W PD)
12.

USB-A (2.0/3.2 Gen1, Downstream)
13.

USB-C2 (2.0/3.2 Gen1, Downstream)
14.

RS-232C In

